



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

Import, Export, YOUR PORT

High-Performance Tyres



THE FUTURE EMERGES

sales@djimportandexport.com

+27 81 329 1736

Construction Tyres



D&J GLOBAL
IMPORT AND EXPORT (PTY) LTD
www.dandj.co.za

M-SKID2

All cross-ply construction with an improved load performance and enhanced operator comfort.

The deep tread and special traction improves performance and has excellent self-cleaning properties.



Applications:



Size	TT/TL	PR	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
				kg	bar				
10-16.5	TL	10	134A2	2135	5.2	8.25	780	280	17
12-16.5	TL	12	145A2	2865	5.5	9.75	835	315	20
445/65 22.5	TL	18	168A2	5600	6.9	14.00	1230	448	22



M-SKID4

All cross-ply construction with an improved load performance and enhanced operator comfort.

The full-flat profile of the M-SKID4 with self-cleaning stepped tread improves performance.



Applications:



Size	TT/TL	 PR	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
				 kg	 bar				
10-16.5	TL	10	134A2	2135	5.2	8.25	773	264	35
12-16.5	TL	12	145A2	2865	5.5	9.75	831	307	35

MR400

R4

Steel belted construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The deep tread and traction pattern improves performance and has excellent self-cleaning properties.



Applications:



Size	TT/TL	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
				kg	bar				
460/70 (17.5L)R24	TL	R4	159B	4375	4.0	DW15L	1254	455	32
500/70 (19.5L)R24	TL	R4	164B	5000	4.0	DW16L	1310	503	38
540/70(21L)R24	TL	R4	168B	5600	4.0	DW18L	1366	540	39.5
400(405)/70R24	TL	R4	158B	4250	5.0	13.00	1170	404	30.5
400(15.5)/80R24	TL	R4	162B	4750	5.0	DW13L	1250	404	35
440/80(16.9)R24	TL	R4	161B	4625	5.0	DW14L	1314	441	37
440/80(16.9)R28	TL	R4	156B	4000	3.2	DW14L	1415	441	37
480/80(18.4)R26	TL	R4	160B	4500	3.2	DW15L	1428	479	38



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

10001 0001 0001 0001

MR500

R4

Steel belted radial tyre. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The deep tread and traction pattern improves performance and has excellent self-cleaning properties.



Applications:



Size	TT/TL	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
				kg	bar				
460/70R24(17.5LR24)	TL	R4	1598	4375	4.0	DW15L	1254	455	32



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

011 440 1111

MA11

E2 / L2

The new tread compound reduces heat build-up at higher speeds and protection against cutting and abrasion. The reinforced sidewall protection rib prevents all kinds of accident damage or hits.

Aggressive non-directional tread pattern provides superior traction in soft underfoot conditions.



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
365/70R18	TL	★★	E2	135B	2180	3.75	11.00	969	360	18
			L2	146A2	3000	3.75				
405/70R18	TL	★★	E2	141B	2575	3.75	13.00	1025	400	19
			L2	153A2	3650	3.75				
405/70R20	TL	★★	E2	143B	2725	3.75	13.00	1080	400	19
			L2	155A2	3875	3.75				



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

Phone: 021 927 1100

MB250

13

Enhanced performance due to traction pattern with excellent self cleaning properties. All cross-ply construction with an improved load performance and enhanced operator comfort.

The extra-deep tread and strong nylon carcass offers puncture resistance and increased tyre life.



Applications:



Size	TT/TL	 PR	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
15.5/80-24	TL	16	13	162A6	4750	4.0	W13	1240	395	35



MB400

R4 / I3

New improved technology of the high-tech casing reduces heat build up inside the tyre.

The MB400 tyre pattern provides superior strength and a longer tread life.



Applications:



Size	TT/TL	PR	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
10.5/80-18	TL	14	R4	123A6	1530	4.8	W9	881	274	25.4
12.5/80-18	TL	16	I3	135A8	2180	4.9	W9	985	309	27.5



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
INCORPORATED IN SOUTH AFRICA

MB410

R4

New improved technology of the high-tech casing reduces heat build up inside the tyre.

The MB410 has a modified tread pattern for excellent traction and flotation in soft underfoot conditions.



Applications:



Size	TT/TL	PR	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5L-24	TL	12	R4	146A8	2995	2.5	15.00	1241	445	26
19.5L-24	TL	12	R4	151A8	3450	2.3	DW16A	1323	460	27
18.4-26	TL	12	R4	156A8	4000	2.5	16.00	1426	467	29
16.9-24	TL	14	R4	151A8	3670	3.3	15.00	1309	429	26
16.9-28	TL	14	R4	154A8	3750	2.7	15.00	1410	429	28
21L-24	TL	12	R4	155A8	3875	2.2	DW18A	1377	533	26.5



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
INCORPORATED IN SOUTH AFRICA

MB260

E2 / L2

New improved technology of the high-tech casing reduces heat build up inside the tyre. All cross-ply construction with an improved load performance and enhanced operator comfort.

The deep tread and non-directional tread pattern design offers increased traction and performance.



Applications:



Size	TT/TL	PR	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
405/70-20 (16/70-20)	TL	14	E2	149B	5250	3.5	13.00	1075	410	23
			L2	168A2	5600	4.5				
405/70-24 (16/70-24)	TL	14	L2	150B	3350	3.5	13.00	1175	410	30
				168A2	5600	4.5				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

10001 0000 0000 0000

MB100

All cross ply construction with an improved load performance and enhanced operator comfort. The massive lugs are reinforced and connected to an extra thick centre tread rubber belt.

Enhanced performance due to aggressive traction pattern with excellent self cleaning properties.



Applications:



Size	TT/TL	PR	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
				kg	bar				
10.00-20	TT	16	146B	3000	7.5	7.50	1055	278	19




MB210

All cross ply construction with an improved load performance and enhanced operator comfort. The massive lugs are reinforced and connected to an extra thick centre tread rubber belt.

Enhanced performance due to aggressive traction pattern with excellent self cleaning properties.



Applications:



Size	TT/TL	PR	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
				kg	bar				
13.00-24	TL	17	143A8	2725	3.0	8.00TG	1280	335	25
			168A2	5600	4.5				
14.00-24	TL	16	153A8	3650	3.5	8.00TG	1350	360	29
			177A2	7300	5.5				



MB720

C7

All cross-ply construction with an improved load performance and enhanced operator comfort.

The tread pattern of the MB720 offers excellent traction and flotation.



Applications:



Size	TT/TL	 PR	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
23.1-26	TL	12	C7	153/6	3655	1.7	0W20	1500	595	16



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
ESTD 2005 • 021 771 0000

MB720S

C1

All cross-ply construction with an improved load performance and enhanced operator comfort.

The MB720S promotes even wear and reduced ground pressure for better compaction performance.



Applications:



Size	TT/TL	 PR	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
11.00-20	TT	18	C1	16942	5800	8.25	8.00	1080	290	22



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
10000 Boksburg, 1501/1502

Mobile Crane Tyres



MA03

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The aggressive, self-cleaning tread design provides excellent traction in severe off-road conditions.



Applications:



E2



Size	TT/TL	Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
385/95R24	TT	★★★	E2	170F	6000	10.0	10.00W	1364	396	25
385/95R25	TL	★★★	E2	170F	6000	10.0	10.00/1.5	1364	396	25
445/95R25	TL	★★★	E2	174F	6700	9.0	11.25/2.0	1488	432	26
525/80R25	TL	★★	E2	176F	7100	7.0	17.00/2.0	1490	540	31
505/95R25	TL	★★★	E2	186F	9500	9.0	13.00/2.5	1570	462	26



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

10001 0001 10001 0001

MA03+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The tread design provides excellent traction in severe off-road conditions.



Applications:



E2



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
385/95R25	TL	★★★	E2	170F	6000	9.0	10.00/1.5	1369	379	24
445/95R25	TL	★★★	E2	174F	6700	9.0	11.25/2.0	1481	435	28



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
19000 1900 1900

Mining and Earth moving Tyres



D & J GLOBAL
AND ASSOCIATES

MA01

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The E3/L3 non-directional tread pattern provides superior traction in soft underfoot.



E3/L3



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5R25	TL	★★	E3	167B	5450	4.5	14.00/1.5	1340	448	27
			L3	182A2	8500	5.75				
20.5R25	TL	★★	E3	177B	7300	4.5	17.00/2.0	1480	527	31
			L3	193A2	11500	5.75				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

1999/0001/01/01/01

MA01+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Proven E3/L3 tread pattern optimised for a wide range of challenging construction and quarry applications.



Applications:



E3/L3



Size	TT/TL	★ Star rating	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5R25	TL	★★	E3	16/8	5450	5.25	14.00/1.5	1350	445	27
			L3	182A2	8500	6.5				
20.5R25	TL	★★	E3	177B	7300	5.25	17.00/2.0	1490	520	33
			L3	193A2	11500	6.5				
23.5R25	TL	★★	E3	185B	9250	5.25	19.50/2.5	1615	595	36
			L3	201A2	14500	6.5				
26.5R25	TL	★★	E3	193B	11500	5.25	22.00/3.0	1750	675	37
			L3	209A2	18500	6.5				
29.5R25	TL	★★	E3	200B	14000	5.25	25.00/3.5	1875	750	43
			L3	216A2	22400	6.5				



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
10001 10001 10001

MA02

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Excellent traction in all off-road applications with thick undertread for improved puncture resistance.



E3+/L3+



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
23.5R25	TL	★★	E3+	185B	9250	5.25	19.50/2.5	1615	590	41
			L3+	201A2	14500	6.5				
26.5R25	TL	★★	E3+	193B	11500	5.0	22.00/3.0	1748	670	41.5
			L3+	209A2	18500	6.5				
29.5R25	TL	★★	E3	200B	13950	4.5	25.00/3.5	1868	748	44
			L3+	216A2	22350	5.75				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

10001 0000 0000 0000

MA02F

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The durable and aggressive E3 open tread design provides the tyre to grip in the most demanding surfaces.



Applications:



E3

★★

Size	TT/TL	 Star rating	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
29.5R29	TL	★★	E3	202B	15000	5.25	25.00/3.5	1960	745	43
33.25R29	TL	★★	E3	209B	18500	5.25	27.00/3.5	2060	860	45
37.25R35	TL	★★	E3	218B	23600	5.25	31.00/4.0	2360	946	48

MA02+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The E3+/L3+, self-cleaning tread design provides excellent traction and stability on the most demanding surfaces.



Applications:



Size	TT/TL	Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
750/65R25	TL	★	E3	190B	10600	4.25	24.00/3.0	1585	740	41
		★★	L3	202A2	15000	4.75				
875/65R29	TL	★	E3	203B	15500	4.25	28.00/3.0	1860	860	49
		★★	L3	214A2	21200	4.75				



MA60

E3 / L3

★★

Radial E3/L3 long-lasting tread provides maximised productivity and reduced long-term operating costs. Special rubber compound and robust casing ensures greater resistance to damage resulting in a prolonged tyre performance.

Innovative tread lugs and grooves provides powerful forward and lateral traction and superior operator comfort.



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
800/80R29 33.25R29	TL	★★	E3	206B	17000	4.5	25.00/3.5	2090	845	50
			L3	225A2	29000	6.5				



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

10001 0000 0000 0000

M-TERRAIN

E4/L4 tread pattern tyre for all terrain. All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Excellent traction and safety characteristics. The multi-edged blocks offer improved flotation and super traction.



Applications:



E4 / L4



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
20.5R25	TL	★★	E4	177B	7300	5.25	17.00/2.0	1490	520	50
			L4	193A2	11500	6.5				
23.5R25	TL	★★	E4	185B	9250	5.25	19.50/2.5	1615	595	53
			L4	195A2	12150	6.5				
26.5R25	TL	★★	E4	193B	11500	5.25	22.00/3.0	1800	675	56
			L4	209A2	18500	6.5				
29.5R25	TL	★★	E4	200B	14000	5.25	25.00/3.5	1920	750	59
			L4	216A2	22400	6.5				
750/65R25	TL	★★	E4	190B	10600	4.75	24.00/3.0	1610	755	53
			L4	209A2	18500	6.25				
875/65R29	TL	★★	E4	203B	15500	4.75	28.00/3.5	1875	880	59
			L4	221A2	25750	6.25				



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

021 461 1211

M-TERRAIN+

E4 / L4



E4/L4 tread pattern tyre for all terrain. All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Excellent traction and safety characteristics. The multi-edged blocks offer improved flotation and super traction.



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
775/65R29	TL	★★	E4	1958	12150	4.25	24.00/3.5	1745	770	56
			L4	213A2	20600	6.25				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

Phone: 021 927 1100

M-TERRAIN+

E4 / L4



E4/L4 tread pattern tyre for all terrain. All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Excellent traction and safety characteristics. The multi-edged blocks offer improved flotation and super traction.



Applications:



Size	TT/TL	 Star rating	TRA code	L/S Index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
775/65R29	TL	★★	E4	1958	12150	4.25	24.00/3.5	1745	770	56
			L4	213A2	20600	6.25				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

Phone: 0800 123 123

MB450

L4

Long lasting compound offers excellent resistance cutting, chipping and heat buildup. Wide base sizes with wide cross section and tread offers exceptional traction and flotation.

Heavy duty bias ply tyre with rock pattern in a nondirectional tread design.



Applications:



Size	TT/TL	 Ply rating	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
17.5-25	TL	16	L4	177A2	7300	4.75	14.00/1.5	1400	445	47



MA04+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The E-4 pattern and aggressive lug design with large blocks at tread centre provides traction and braking on rough surfaces.



E4



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	ber				
14.00R25	TT TL	★★★	E4	169B	5800	7.0	10.00/1.5	1420	375	38
16.00R25	TT TL	★★★	E4	180B	8000	8.0	11.25/2.0	1550	430	44
18.00R25	TL	★★★	E4	189B	10300	8.0	13.00/2.5	1675	500	51
18.00R33	TL	★★★	E4	211B	19500	8.0	13.00/2.5	1875	500	54
21.00R33	TL	★★★	E4	203B	15500	8.0	15.00/3.0	1955	570	54
21.00R35	TL	★★★	E4	204B	16000	8.0	15.00/3.0	2005	570	61
24.00R35	TL	★★★	E4	212B	20000	8.0	17.00/3.5	2175	655	65

MA04+ GIANT

E4



All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Aggressive extra deep tread pattern that offers long and even tread wear. Features a cooler running design and improved traction.



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	TKPH				
					kg	bar					A1	A2	ST	B2	B1
37.00R57	TL	★★	E4	246B	53000	7.25	27.00/6.0	3440	1050	99	682	800	880	960	1111
40.00R57	TL	★★	E4	250B	60000	7.0	29.00/6.0	3560	1130	99	631	750	805	860	1006
44/90R57	TL	★★	E4	252B	63000	7.0	29.00/6.0	3560	1180	98	696	816	898	980	1134
50/80R57	TL	★★	E4	257B	73000	6.0	31.00/5.0	3620	1266	95	715	780	980	1180	1305
59/80R63	TL	★★	F4	268B	100000	6.0	44.00/5.0	4026	1480	88	1093	1216	1476	1736	1940



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
19001 Bona, 19271100

M-ROCK

All steel radial construction. Improved protector plies optimise load performance and operator comfort. The E4 tread pattern improves the wear resistance and reduces internal friction and uneven wear.

The deep non-directional E4 tread pattern provides excellent traction & protection against cuts and damages.



E4



Applications:



Size	TT/TL	 Star rating	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
27.00R49	TL	★★	E4	223B	27250	7.0	19.50/4.0	2688	710	68

M-RIGID

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The deep non-directional F4 tread pattern provides excellent traction & protection against cuts and damages.



Applications:



E4



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	TKPH				
					kg	bar					A1	A2	ST	B2	B1
27.00R49	TL	★★★	E4	223B	27250	8.0	19.50/4.0	2691	738	82	390	465	500	605	650
			E4	226B	30000	8.0					335	393	459	566	605
33.00R51	TL	★★★	E4	235B	38750	8.0	24.00/5.0	3040	925	95	462	525	638	723	827



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

10001 0000 10000000

MA09+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Deep E4 tread pattern provides resistance to cutting, chipping and shock damage and enhances tyre life.



Applications:



E4



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	TKPH				
					kg	bar					A1	A2	ST	B2	B1
30.00R51	TL	★★	E4	2308	33500	6.5	22.00/4.5	2878	845	75	456	536	588	643	744
36.00R51	TL	★★	E4	241B	46250	6.5	26.00/5.0	3194	990	83	631	740	814	888	1028



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

19001 0000 10271100

MB440

E4

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Deep E4 tread pattern provides resistance to cutting, chipping and shock damage and enhances tyre life.



Applications:



Size	TT/TL	 Ply rating	TRA code	L/S Index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
27.00-49	TL	48	E4	2208	22710	5.75	19.50	2700	735	70



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
INCORPORATED IN SOUTH AFRICA

MA05

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The extra deep 1.5 rock tread and reinforced shoulders and sidewalls prevent damage in severe operating conditions.



L5



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5R25	TL	★★	L5	182A2	8500	5.75	14.00/1.5	1400	470	66
26.5R25	TL	★★	L5	209A2	18500	5.75	22.00/3.0	1800	690	92
29.5R25	TL	★★	L5	216A2	22400	5.75	23.00/3.5	1905	775	100



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
19001 Bona Vista Road

MA07+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The L5 tread pattern protects against tears, wear and cuts while providing stability, comfort and traction.



L5

★ ★ ★

Applications:



Size	TT/TL	Star rating	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
35/65R33	TL	★ ★ ★	L5	229A2	32500	8.0	28.00/3.5	2075	890	97



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

19001 0000 10271100


MA08

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The massive tread blocks and aggressive L4/L5 open tread design provides outstanding grip and traction.



Applications:

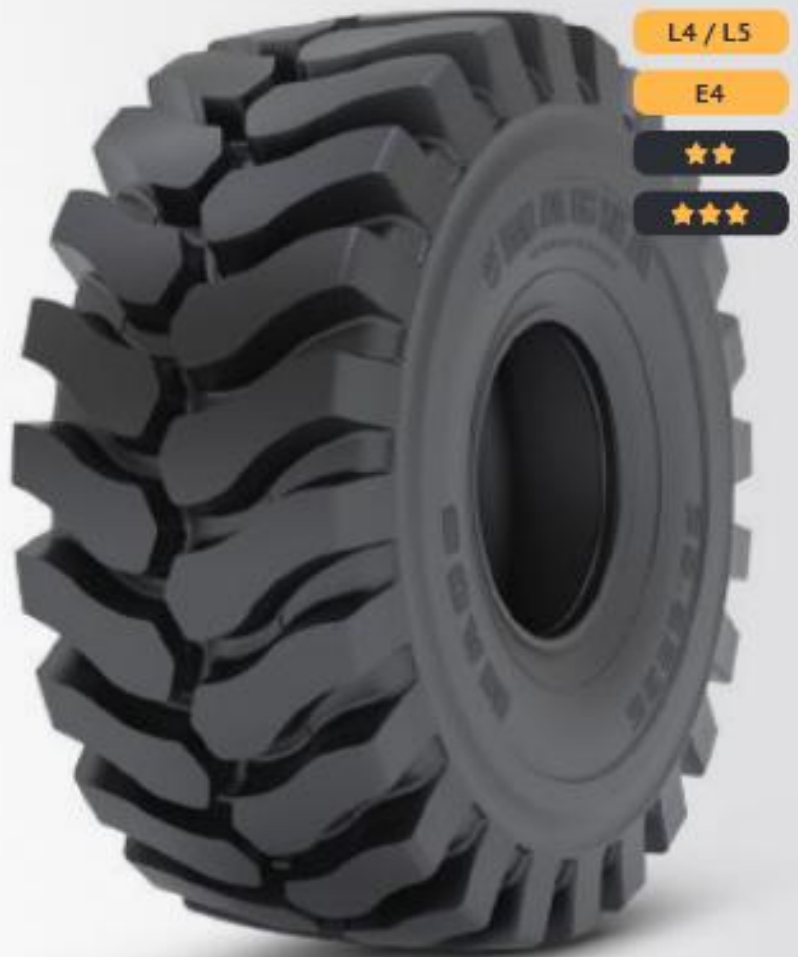

Size	TT/TL	Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5R25	TL	★★	L5	182A2	8500	6.5	14.00/1.5	1400	440	65
20.5R25	TL	★★	L5	193A2	11500	6.5	17.00/2.0	1530	525	72
23.5R25	TL	★★	L5	201A2	14500	6.5	19.50/2.5	1659	605	77
26.5R25	TL	★★★	L5	214A2	21200	8.0	22.00/3.0	1775	675	85
29.5R25	TL	★★★★	L5	221A2	25750	8.0	25.00/3.5	1880	750	98
29.5R29	TL	★★	L5	218A2	23600	6.5	25.00/3.5	2025	750	95
35/65R33	TL	★★	E4	207B	17500	5.25	28.00/3.5	2075	880	62.5
			L4	224A2	28000	6.5				
35/65R33	TL	★★	L5	224A2	28000	6.5	28.00/3.5	2075	880	97

MA10

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Extra deep 1.5 tread pattern for excellent traction in the most severe circumstances.



L5



Applications:



Size	TT/TL	★ Star rating	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
20.5R25	TL	★★	L5	193A2	11500	6.5	17.00/2.0	1530	536	72
23.5R25	TL	★★	L5	201A2	14500	6.5	19.50/2.5	1662	612	78



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

19/01/2019 12:27:11

MA10+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Super deep open tread pattern designed for wheel loaders, dozers and grader requiring maximum traction.



Applications:



L5



Size	TT/TL	 Star rating	TRA code	L/S Index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
15.5R25	TL	★★	L5	176A2	7100	6.5	12.00/1.3	1325	395	60
20.5R25	TL	★★	L5	193A2	11500	6.5	17.00/2.0	1550	520	70
23.5R25	TL	★★	L5	201A2	14500	6.5	19.50/2.5	1675	595	76
26.5R25	TL	★★	L5	209A2	18500	6.5	22.00/3.0	1800	675	86
29.5R25	TL	★★	L5	216A2	22400	6.5	25.00/3.5	1920	750	96

MB10

L5

All cross-ply construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Extra deep L5 tread pattern for excellent traction in the most severe circumstances.



Applications:



Size	TT/TL	PR	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
26.5-25	TL	28	L5	203A2	15500	4.75	22.00/3.0	1800	675	91
26.5-25	TL	40	L5	211A2	19500	7.0	2200/3.0	1800	675	91



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
ESTD 2005 - 15/11/2021

M-DESERT

E7

All cross-ply construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

The E7 tread pattern protects against tears, wear and cuts while providing stability, comfort and traction.



Applications:



Size	TT/TL	 Ply rating	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
29.5-25	TL	28	E7	193B	11500	2.5	25.00/3.5	1830	750	21.5



M-SNOW

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build-up inside the tyre.

Open and self cleaning tread pattern with separate tread blocks and multiple sipes for excellent traction.



Applications:



G2 / L2



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5R25	TL	★	G2	162A8	4750	4.5	14.00/1.5	1350	445	78
		★★	L2	182A2	8500	6.5				
20.5R25	TL	★	G2	170A8	6000	4.5	17.00/2.0	1490	520	31
		★★	L2	193A2	11500	6.5				
23.5R25	TL	★★	G2	179A8	7750	4.5	19.50/2.5	1615	545	34
			L2	201A2	14500	6.5				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

19001 0000 10271100

MU25

The aggressive E4/L4 open tread pattern provides outstanding grip and traction. Even contact area minimises vibration, resulting in improved operator comfort.

The directional block design and square shoulders provide outstanding durability.



E4 / L4

★★★★

★★★★

Applications:



Size	TT/TL	 Star rating	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
29.5R29	TL	★★★	L4	225A2	27250	8.0	25.00/3.5	2000	760	65
		★★★★	E4	219A8	24300	8.0				
33/65R33	TL	★★★	L4	229A2	32500	8.0	28.00/3.5	2050	880	62
		★★★★	E4	225A8	29000	8.0				

MU26

Experience superior grip and traction with our large pattern design, ensuring safety in underground coal and metal mines. Unmatched chip and wear resistance for reliable performance.

Precision pattern for optimal traction, ensuring stability and performance on various terrains effortlessly.



E4 / L4

★★★★

★★★★★

Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
26.5R25	TL	★★★	L4	214A2	21200	8.0	22.00/3.0	1760	673	56
		★★★★	E4	210A8	19000	8.0				
29.5R25	TL	★★★	L4	221A2	25750	8.0	25.00/3.5	1875	750	66
		★★★★	E4	217A8	23000	8.0				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

Phone: 0800 123 123

MU30

Outstanding damage resistance and load capacity due to the reinforced radial casing. The reinforced sidewalls provides increasing shock and abrasion resistance.

Massive lugs and cut-resistant centre provide tread robustness and increased service life.



E4 / L4

★★★★

★★★★

Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					lug	bar				
26.5R25	IL	★★★★	L4	214A2	21200	8.0	22.00/3.0	1730	660	56
	TL	★★★★★	E4	210A8	19000	8.0				
29.5R25	TL	★★★★	L4	221A2	25750	8.0	25.00/3.5	1865	765	59
	TL	★★★★★	E4	217A8	23000	8.0				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

1900 8000 1927/1000

MA05S

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Extra-deep L5S smooth design provides best resistance to wear and cutting and lowers operating costs.



L5S

★★

★★★

Applications:



Size	TT/TL	★ Star rating	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5R25	TL	★★	L5S	182A2	8500	6.5	14.00/1.5	1400	445	66
18.00R25	TL	★★★	L5S	206A2	17000	9.0	13.00/2.5	1675	500	82
23.5R25	TL	★★	L5S	201A2	14500	6.5	19.50/2.5	1673	597	83
26.5R25	TL	★★	L5S	209A2	18500	6.5	22.00/3.0	1800	675	94
29.5R25	TL	★★	L5S	216A2	22400	6.5	25.00/3.5	1971	750	100
29.5R29	TL	★★	L5S	218A2	23600	6.5	25.00/3.5	2023	750	100
35/65R33	TL	★★	L5S	224A2	28000	6.5	28.00/3.5	2050	895	97



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
INCORPORATED IN SOUTH AFRICA

MB05S

L55

All cross-ply construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Special tread compound, smooth deep tread design provides excellent resistance and improves tyre service life.



Applications:



Size	TT/TL	PR	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
14.00-24	TL TT	28	L55	188A2	10000	9.25	10.00	1420	375	63.5
17.5-25	TL	24	L55	185A2	9250	7.0	14.00	1400	445	78
18.00-25	TL	40	L55	206A2	17000	9.5	13.00	1675	500	94
26.5-25	TL	36	L55	209A2	18300	8.25	22.00	1800	675	87.5



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

Port Terminal Tyres



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

021 461 1000

MB01

IND-3 / IND-4

New improved technology of the high-tech casing reduces heat build up inside the tyre. All cross-ply construction. Improved protector plies optimise load performance and operator comfort.

Improved traction and performance through non-directional IND-3/IND-4 tread design.



Applications:



Size	TT/TL	PR	TRA code	Load capacity (kg)				Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	Pressure (bar)
				Static	5 km/h	10 km/h	25 km/h					
16.00-25	TL	32	IND-3	22500	18100	16900	15600	11.25/2.0	1490	430	32	10.0
21.00-25	TL	40	IND-3	36400	29300	27300	26500	15.00/3.0	1750	575	38	10.0
18.00-33	TL	40	IND-4	37000	29900	27800	25700	13.00/2.5	1875	500	70	10.0
21.00-35	TL	40	IND-3	43700	35200	32800	30400	15.00/3.0	2005	570	38	10.0



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

1000 0000 0000 0000

MB01S

IND-4S

New improved technology of the high-tech casing reduces heat build up inside the tyre. All cross-ply construction. Improved protector plies optimise load performance and operator comfort.

Improved traction and performance through non-directional IND-4S tread design.



Applications:



Size	TT/TL	PR	TRA code	Load capacity (kg)				Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	Pressure (bar)
				Static	5 km/h	10 km/h	25 km/h					
18.00-25	TL	40	IND-4S	31500	25400	23600	22700	13.00/2.5	1675	500	56.5	10.0



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

19001 0000 10271100

M-STACKER

IND-4

All cross-ply construction with an improved load performance and enhanced operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Deep, wide tread grooves supports easier turning by reducing stress in tread blocks.



Applications:



Size	TT/TL	 PR	TRA code	Load capacity (kg)						 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
				Static		10 km/h		25 km/h					
				Load wheel	Steering wheel	Load wheel	Steering wheel	Load wheel	Steering wheel				
18.00-25	TL	40	IND-4	31500	25200	23600	18900	21900	17500	15.00/2.5	1673	315	55



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

1999/001/12/11/11/11

M-STACKER+

IND-4

All cross-ply construction with an improved load performance and enhanced operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Deep, wide tread grooves supports easier turning by reducing stress in tread blocks.



Applications:



Size	TT/TL		TRA code	Load capacity (kg)									
				Static		10 km/h		25 km/h					
				Load wheel	Steering wheel	Load wheel	Steering wheel	Load wheel	Steering wheel				
18.00-25	TL	40	IND-4	31500	25200	23600	18900	21900	17500	13.00/2.5	1675	515	70



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

Phone: 021 527 1100

MB02

IND-3 / IND-4

All cross-ply construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Improved traction and performance through non-directional IND-3/IND-4 tread design.



Applications:



Size	TT/TL	PR	TRA code	Pressure (bar)	Load capacity (kg)				Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					Static	5 km/h	10 km/h	25 km/h				
11.00-20	TT	18	IND-3	8.5	10030	7615	6920	5830	8.0	1085	293	22
12.00-24	TL/TT	24	IND-4	10.0	12300	10800	9300	7100	8.5	1245	315	35
14.00-24	TL	28	IND-4	10.0	18000	14500	13500	12000	10.0	1370	375	50
18.00-25	TL	40	IND-3	11.5	30600	24600	22900	21200	13.00/2.5	1615	500	30.5
18.00-25	TL	40	IND-4	11.5	30600	24600	22900	21200	13.00/2.5	1675	500	56
18.00-33	TL	40	IND-4	11.5	38200	30700	28600	26500	13.00	1875	500	60



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

www.djglobal.co.za

MA12

E3

All steel radial construction. Improved protector plies optimize load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Developed with a deep tread profile and industrial casing, the tyre offers high resistance to damage and punctures.



Applications:



Size	TT/TL	 Star rating	TRA code	L/S Index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
14.00R25	TL	★★★	E3	193A5	11500	10.0	10.00/1.5	1370	375	27



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

1993/0001/12/01/0001

E3 / L3

Improved traction and performance through deep non-directional tread design.



Size	TT/TL	 PR	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
15,5-25	TL	12	E3	149B	3250	2.5	12.00/1.3	1275	395	24.5
			L3	168A2	5600	4.0				

MB300

E3 / L3

All cross-ply construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Improved traction and performance through deep non-directional tread design.



Applications:



Size	TT/TL	PR	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
15.5-25	TL	12	E3	149B	3250	2.5	12.00/1.3	1275	395	24.5
			L3	168A2	5600	4.0				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

1999/0001/01/01/01

MB800

IND / E3

All cross-ply construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Self-cleaning and non-directional tread pattern.



Applications:



Size	TT/TL	PR	TRA code	Load capacity (kg)				Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
				Drive wheel 25 km/h	Steer wheel 25 km/h	Drive wheel 35 km/h	Steer wheel 35 km/h				
5.00-8	TT	10	IND	1150	970	1065	850	3.50D	470	137	11
6.00-9	TT	10	IND	1505	1275	1400	1120	4.00	540	160	12
6.50-10	TT	12	IND	1895	1600	1765	1410	5.00	590	175	13
7.00-12	TT	14	IND	2590	2190	2405	1925	5.00	676	190	14
8.25-15	TT	14	IND	3775	3185	3505	2800	6.50	840	225	18
28x9-15	TT	14	IND	3050	2575	2835	2265	7.00	710	220	18
250-15	TT	18	IND	4110	3470	3820	3050	7.50	735	250	18
300-15	TT	20	IND	5940	4990	5485	4375	8.00	840	300	20
10.00-20	TT	20	E3	6950	5800	6500	5150	7.50	1073	278	22
12.00-20	TT	20	E3	7750	6510	7207	5735	8.50	1125	315	23
12.00-20	TT	24	E3	8500	7140	7905	6290	8.50	1145	315	23



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
1998-2000-2001-2002-2003-2004-2005-2006-2007-2008-2009-2010-2011-2012-2013-2014-2015-2016-2017-2018-2019-2020-2021-2022-2023-2024-2025-2026-2027-2028-2029-2030-2031-2032-2033-2034-2035-2036-2037-2038-2039-2040-2041-2042-2043-2044-2045-2046-2047-2048-2049-2050-2051-2052-2053-2054-2055-2056-2057-2058-2059-2060-2061-2062-2063-2064-2065-2066-2067-2068-2069-2070-2071-2072-2073-2074-2075-2076-2077-2078-2079-2080-2081-2082-2083-2084-2085-2086-2087-2088-2089-2090-2091-2092-2093-2094-2095-2096-2097-2098-2099-2100-2101-2102-2103-2104-2105-2106-2107-2108-2109-2110-2111-2112-2113-2114-2115-2116-2117-2118-2119-2120-2121-2122-2123-2124-2125-2126-2127-2128-2129-2130-2131-2132-2133-2134-2135-2136-2137-2138-2139-2140-2141-2142-2143-2144-2145-2146-2147-2148-2149-2150-2151-2152-2153-2154-2155-2156-2157-2158-2159-2160-2161-2162-2163-2164-2165-2166-2167-2168-2169-2170-2171-2172-2173-2174-2175-2176-2177-2178-2179-2180-2181-2182-2183-2184-2185-2186-2187-2188-2189-2190-2191-2192-2193-2194-2195-2196-2197-2198-2199-2200-2201-2202-2203-2204-2205-2206-2207-2208-2209-2210-2211-2212-2213-2214-2215-2216-2217-2218-2219-2220-2221-2222-2223-2224-2225-2226-2227-2228-2229-2230-2231-2232-2233-2234-2235-2236-2237-2238-2239-2240-2241-2242-2243-2244-2245-2246-2247-2248-2249-2250-2251-2252-2253-2254-2255-2256-2257-2258-2259-2260-2261-2262-2263-2264-2265-2266-2267-2268-2269-2270-2271-2272-2273-2274-2275-2276-2277-2278-2279-2280-2281-2282-2283-2284-2285-2286-2287-2288-2289-2290-2291-2292-2293-2294-2295-2296-2297-2298-2299-2300-2301-2302-2303-2304-2305-2306-2307-2308-2309-2310-2311-2312-2313-2314-2315-2316-2317-2318-2319-2320-2321-2322-2323-2324-2325-2326-2327-2328-2329-2330-2331-2332-2333-2334-2335-2336-2337-2338-2339-2340-2341-2342-2343-2344-2345-2346-2347-2348-2349-2350-2351-2352-2353-2354-2355-2356-2357-2358-2359-2360-2361-2362-2363-2364-2365-2366-2367-2368-2369-2370-2371-2372-2373-2374-2375-2376-2377-2378-2379-2380-2381-2382-2383-2384-2385-2386-2387-2388-2389-2390-2391-2392-2393-2394-2395-2396-2397-2398-2399-2400-2401-2402-2403-2404-2405-2406-2407-2408-2409-2410-2411-2412-2413-2414-2415-2416-2417-2418-2419-2420-2421-2422-2423-2424-2425-2426-2427-2428-2429-2430-2431-2432-2433-2434-2435-2436-2437-2438-2439-2440-2441-2442-2443-2444-2445-2446-2447-2448-2449-2450-2451-2452-2453-2454-2455-2456-2457-2458-2459-2460-2461-2462-2463-2464-2465-2466-2467-2468-2469-2470-2471-2472-2473-2474-2475-2476-2477-2478-2479-2480-2481-2482-2483-2484-2485-2486-2487-2488-2489-2490-2491-2492-2493-2494-2495-2496-2497-2498-2499-2500-2501-2502-2503-2504-2505-2506-2507-2508-2509-2510-2511-2512-2513-2514-2515-2516-2517-2518-2519-2520-2521-2522-2523-2524-2525-2526-2527-2528-2529-2530-2531-2532-2533-2534-2535-2536-2537-2538-2539-2540-2541-2542-2543-2544-2545-2546-2547-2548-2549-2550-2551-2552-2553-2554-2555-2556-2557-2558-2559-2560-2561-2562-2563-2564-2565-2566-2567-2568-2569-2570-2571-2572-2573-2574-2575-2576-2577-2578-2579-2580-2581-2582-2583-2584-2585-2586-2587-2588-2589-2590-2591-2592-2593-2594-2595-2596-2597-2598-2599-2600-2601-2602-2603-2604-2605-2606-2607-2608-2609-2610-2611-2612-2613-2614-2615-2616-2617-2618-2619-2620-2621-2622-2623-2624-2625-2626-2627-2628-2629-2630-2631-2632-2633-2634-2635-2636-2637-2638-2639-2640-2641-2642-2643-2644-2645-2646-2647-2648-2649-2650-2651-2652-2653-2654-2655-2656-2657-2658-2659-2660-2661-2662-2663-2664-2665-2666-2667-2668-2669-2670-2671-2672-2673-2674-2675-2676-2677-2678-2679-2680-2681-2682-2683-2684-2685-2686-2687-2688-2689-2690-2691-2692-2693-2694-2695-2696-2697-2698-2699-2700-2701-2702-2703-2704-2705-2706-2707-2708-2709-2710-2711-2712-2713-2714-2715-2716-2717-2718-2719-2720-2721-2722-2723-2724-2725-2726-2727-2728-2729-2730-2731-2732-2733-2734-2735-2736-2737-2738-2739-2740-2741-2742-2743-2744-2745-2746-2747-2748-2749-2750-2751-2752-2753-2754-2755-2756-2757-2758-2759-2760-2761-2762-2763-2764-2765-2766-2767-2768-2769-2770-2771-2772-2773-2774-2775-2776-2777-2778-2779-2780-2781-2782-2783-2784-2785-2786-2787-2788-2789-2790-2791-2792-2793-2794-2795-2796-2797-2798-2799-2800-2801-2802-2803-2804-2805-2806-2807-2808-2809-2810-2811-2812-2813-2814-2815-2816-2817-2818-2819-2820-2821-2822-2823-2824-2825-2826-2827-2828-2829-2830-2831-2832-2833-2834-2835-2836-2837-2838-2839-2840-2841-2842-2843-2844-2845-2846-2847-2848-2849-2850-2851-2852-2853-2854-2855-2856-2857-2858-2859-2860-2861-2862-2863-2864-2865-2866-2867-2868-2869-2870-2871-2872-2873-2874-2875-2876-2877-2878-2879-2880-2881-2882-2883-2884-2885-2886-2887-2888-2889-2890-2891-2892-2893-2894-2895-2896-2897-2898-2899-2900-2901-2902-2903-2904-2905-2906-2907-2908-2909-2910-2911-2912-2913-2914-2915-2916-2917-2918-2919-2920-2921-2922-2923-2924-2925-2926-2927-2928-2929-2930-2931-2932-2933-2934-2935-2936-2937-2938-2939-2940-2941-2942-2943-2944-2945-2946-2947-2948-2949-2950-2951-2952-2953-2954-2955-2956-2957-2958-2959-2960-2961-2962-2963-2964-2965-2966-2967-2968-2969-2970-2971-2972-2973-2974-2975-2976-2977-2978-2979-2980-2981-2982-2983-2984-2985-2986-2987-2988-2989-2990-2991-2992-2993-2994-2995-2996-2997-2998-2999-3000-3001-3002-3003-3004-3005-3006-3007-3008-3009-3010-3011-3012-3013-3014-3015-3016-3017-3018-3019-3020-3021-3022-3023-3024-3025-3026-3027-3028-3029-3030-3031-3032-3033-3034-3035-3036-3037-3038-3039-3040-3041-3042-3043-3044-3045-3046-3047-3048-3049-3050-3051-3052-3053-3054-3055-3056-3057-3058-3059-3060-3061-3062-3063-3064-3065-3066-3067-3068-3069-3070-3071-3072-3073-3074-3075-3076-3077-3078-3079-3080-3081-3082-3083-3084-3085-3086-3087-3088-3089-3090-3091-3092-3093-3094-3095-3096-3097-3098-3099-3100-3101-3102-3103-3104-3105-3106-3107-3108-3109-3110-3111-3112-3113-3114-3115-3116-3117-3118-3119-3120-3121-3122-3123-3124-3125-3126-3127-3128-3129-3130-3131-3132-3133-3134-3135-3136-3137-3138-3139-3140-3141-3142-3143-3144-3145-3146-3147-3148-3149-3150-3151-3152-3153-3154-3155-3156-3157-3158-3159-3160-3161-3162-3163-3164-3165-3166-3167-3168-3169-3170-3171-3172-3173-3174-3175-3176-3177-3178-3179-3180-3181-3182-3183-3184-3185-3186-3187-3188-3189-3190-3191-3192-3193-3194-3195-3196-3197-3198-3199-3200-3201-3202-3203-3204-3205-3206-3207-3208-3209-3210-3211-3212-3213-3214-3215-3216-3217-3218-3219-3220-3221-3222-3223-3224-3225-3226-3227-3228-3229-3230-3231-3232-3233-3234-3235-3236-3237-3238-3239-3240-3241-3242-3243-3244-3245-3246-3247-3248-3249-3250-3251-3252-3253-3254-3255-3256-3257-3258-3259-3260-3261-3262-3263-3264-3265-3266-3267-3268-3269-3270-3271-3272-3273-3274-3275-3276-3277-3278-3279-3280-3281-3282-3283-3284-3285-3286-3287-3288-3289-3290-3291-3292-3293-3294-3295-3296-3297-3298-3299-3300-3301-3302-3303-3304-3305-3306-3307-3308-3309-3310-3311-3312-3313-3314-3315-3316-3317-3318-3319-3320-3321-3322-3323-3324-3325-3326-3327-3328-3329-3330-3331-3332-3333-3334-3335-3336-3337-3338-3339-3340-3341-3342-3343-3344-3345-3346-3347-3348-3349-3350-3351-3352-3353-3354-3355-3356-3357-3358-3359-3360-3361-3362-3363-3364-3365-3366-3367-3368-3369-3370-3371-3372-3373-3374-3375-3376-3377-3378-3379-3380-3381-3382-3383-3384-3385-3386-3387-3388-3389-3390-3391-3392-3393-3394-3395-3396-3397-3398-3399-3400-3401-3402-3403-3404-3405-3406-3407-3408-3409-3410-3411-3412-3413-3414-3415-3416-3417-3418-3419-3420-3421-3422-3423-3424-3425-3426-3427-3428-3429-3430-3431-3432-3433-3434-3435-3436-3437-3438-3439-3440-3441-3442-3443-3444-3445-3446-3447-3448-3449-3450-3451-3452-3453-3454-3455-3456-3457-3458-3459-3460-3461-3462-3463-3464-3465-3466-3467-3468-3469-3470-3471-3472-3473-3474-3475-3476-3477-3478-3479-3480-3481-3482-3483-3484-3485-3486-3487-3488-3489-3490-3491-3492-3493-3494-3495-3496-3497-3498-3499-3500-3501-3502-3503-3504-3505-3506-3507-3508-3509-3510-3511-3512-3513-3514-3515-3516-3517-3518-3519-3520-3521-3522-3523-3524-3525-3526-3527-3528-3529-3530-3531-3532-3533-3534-3535-3536-3537-3538-3539-3540-3541-3542-3543-3544-3545-3546-3547-3548-3549-3550-3551-3552-3553-3554-3555-3556-3557-3558-3559-3560-3561-3562-3563-3564-3565-3566-3567-3568-3569-3570-3571-3572-3573-3574-3575-3576-3577-3578-3579-3580-3581-3582-3583-3584-3585-3586-3587-3588-3589-3590-3591-3592-3593-3594-3595-3596-3597-3598-3599-3600-3601-3602-3603-3604-3605-3606-3607-3608-3609-3610-3611-3612-3613-3614-3615-3616-3617-3618-3619-3620-3621-3622-3623-3624-3625-3626-3627-3628-3629-3630-3631-3632-3633-3634-3635-3636-3637-3638-3639-3640-3641-3642-3643-3644-3645-3646-3647-3648-3649-3650-3651-3652-3653-3654-3655-3656-3657-3658-3659-3660-3661-3662-3663-3664-3665-3666-3667-3668-3669-3670-3671-3672-3673-3674-3675-3676-3677-3678-3679-3680-3681-3682-3683-3684-3685-3686-3687-3688-3689-3690-3691-3692-3693-3694-3695-3696-3697-3698-3699-3700-3701-3702-3703-3704-3705-3706-3707-3708-3709-3710-3711-3712-3713-3714-3715-3716-3717-3718-3719-3720-3721-3722-3723-3724-3725-3726-3727-3728-3729-3730-3731-3732-3733-3734-3735-3736-3737-3738-3739-3740-3741-3742-3743-3744-3745-3746-3747-3748-3749-3750-3751-3752-3753-3754-3755-3756-3757-3758-3759-3760-3761-3762-3763-3764-3765-3766-3767-3768-3769-3770-3771-3772-3773-3774-3775-3776-3777-3778-3779-3780-3781-3782-3783-3784-3785-3786-3787-3788-3789-3790-3791-3792-3793-3794-3795-3796-3797-3798-3799-3800-3801-3802-3803-3804-3805-3806-3807-3808-3809-3810-3811-3812-3813-3814-3815-3816-3817-3818-3819-3820-3821-3822-3823-3824-3825-3826-3827-3828-3829-3830-3831-3832-3833-3834-3835-3836-3837-3838-3839-3840-3841-3842-3843-3844-3845-3846-3847-3848-3849-3850-3851-3852-3853-3854-3855-3856-3857-3858-3859-3860-3861-3862-3863-3864-3865-3866-3867-3868-3869-3870-3871-3872-3873-3874-3875-3876-3877-3878-3879-3880-3881-3882-3883-3884-3885-3886-3887-3888-3889-3890-3891-3892-3893-3894-3895-3896-3897-3898-3899-3900-3901-3902-3903-3904-3905-3906-3907-3908-3909-3910-3911-3912-3913-3914-3915-3916-3917-3918-3919-3920-3921-3922-3923-3924-3925-3926-3927-3928-3929-3930-3931-3932-3933-3934-3935-3936-3937-3938-3939-3940-3941-3942-3943-3944-3945-3946-3947-3948-3949-3950-3951-3952-3953-3954-3955-3956-3957-3958-3959-3960-3961-3962-3963-3964-3965-3966-3967-3968-3969-3970-3971-3972-3973-3974-3975-3976-3977-3978-3979-3980-3981-3982-3983-3984-3985-3986-3987-3988-3989-3990-3991-3992-3993-3994-3995-3996-3997-3998-3999-4000-4001-4002-4003-4004-4005-4006-4007-4008-4009-4010-4011-4012-4013-4014-4015-4016-4017-4018-4019-4020-4021-4022-4023-4024-4025-4026-4027-4028-4029-4030-4031-4032-4033-4034-4035-4036-4037-4038-4039-4040-4041-4042-4043-4044-4045-4046-4047-4048-4049-4050-4051-4052-4053-4054-4055-4056-4057-4058-4059-4060-4061-4062-4063-4064-4065-4066-4067-4068-4069-4070-407

MR800+

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Engineered with special tread compound to run cool, fight rapid wear and deliver remarkable stability.



IND-3 / IND-4

★★

★★★

Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
9.00R20	TL	★★	IND-3	194A5	12000	10.0	7.00	1030	270	33
10.00R20	TT	★★	IND-3	166A5	5300	10.0	7.00	1055	280	35
12.00R20	TT	★★	IND-4	176A5	7100	10.0	8.50	1120	305	40
12.00R24	TT	★★★	IND-4	178A5	7500	10.0	8.50	1222	305	40
14.00R24	TT	★★★	IND-4	193A5	11500	10.0	10.0	1408	386	65
16.00R25	TL	★★★	IND-4	200A5	14000	10.0	11.25/2.0	1510	420	71



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
1998/001/2017/001

M-TERMINAL

IND-3

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Developed with a deep tread profile and industrial casing, the tyre offers high resistance to damage and punctures.



Applications:



Size	TT/TL	TRA code	L/S index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
				 kg	 bar				
280/75R22.5	TL	IND-3	168A8	5600	10.0	8.25	992	280	32
310/80R22.5	TL	IND-3	175A8	6900	10.0	9.00	1078	500	32



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
1999/0001/07/0001

M-TERMINAL+

IND-3

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Developed with a deep tread profile and industrial casing, the tyre offers high resistance to damage and punctures.



Applications:



Size	TT/TL	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
				kg	bar				
310/80R22.5	TL	IND-3	175A8	6900	10.0	9.00	1080	310	30



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

011 440 1111

M-STRADDLE

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Deep and ribbed tread pattern guarantee excellent resistance to damage and impacts.



Applications:



IND-4

★★

Size	TT/TL	★ Star rating	TRA code	L/S Index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
16.00R25	TL	★★	IND-4	202A7	15000	10.0	11.25/2.0	1550	430	50

M-STRADDLE

IND-4



All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Deep and ribbed tread pattern guarantee excellent resistance to damage and impacts.



Applications:



Size	TT/TL	 Star rating	TRA code	L/S Index	Load capacity		 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)
					 kg	 bar				
16.00R25	TL	★★	IND-4	202A7	15000	10.0	11.25/2.0	1550	430	50



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

1999-2020 D&J

Solid Tyres



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
10001 Boksbaai, 2010

MA600

Extremely stable at slow speed and stationary high load applications.
High maneuverability while minimising the risk of tread cracks.

Improved abrasion resistance to increase the lifetime of the tyre.

Applications:



Size	 Rim	 O.D. (mm)	 S.W. (mm)	 T.D. (mm)	Load capacity (kg)						Other industrial vehicles
					10 km/h		16 km/h		25 km/h		
					Drive	Steer	Drive	Steer	Drive	Steer	
16.00-25	11.25/2.0	1456	410	45	11800	9000	10800	8300	10000	7700	7700
18.00-25	13.00/2.5	1615	480	55	22120	16960	20490	15430	19200	14360	14600
23.5-25	19.50/2.5	1630	590	50	30960	23800	22460	17280	20800	16500	16000



MA601

Optimised compound delivers exceptional protection against cut and puncture damages. Tread pattern delivers a reduced rolling resistance with excellent strength and abrasion resistance.

Wide profile and deep tread lugs provides machine stability and outstanding traction.

Applications:



Size	Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	Load capacity (kg)			
					Static	5 km/h	10 km/h	25 km/h
17.5-25	14.00/1.5	1324	435	70	14950	10270	9350	8500
20.5-25	17.00/2.0	1480	520	80	16900	11600	10560	9600
23.5-25	19.50/2.5	1610	590	90	21100	14400	13200	12000
26.5-25	22.00/3.0	1720	650	100	25500	17550	15950	16500
29.5-25	25.00/3.5	1870	740	180	32550	22350	20350	18500
35/65-33	28.00/3.5	2030	830	175	42250	29050	25950	24000



MA608

Extremely stable, puncture resistant and maintenance-free assures a long service life, and a high loading capacity for forklift trucks and other industrial applications.

Proven tread profile with large profile blocks deliver excellent traction on a wide range of surfaces.



Applications:



Size	Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	Load capacity (kg)								
					6 km/h		10 km/h		25 km/h		Other industrial vehicles		
					Drive	Steer	Drive	Steer	Drive	Steer	Static	6 km/h	10 km/h
10.00-20	7.0	1002	250	47	6845	5705	6260	5215	5815	4845	7270	5815	4845
	7.5				7075	5895	6460	5385	6000	5000	7500	6500	5000
12.00-20	8.0	1081	265	47	8640	7200	7885	6570	7320	6100	9150	7930	6100
	8.5				8920	7435	8140	6785	7560	6300	9450	8190	6300
12.00-24	8.5	1185	295	45	9125	7605	8335	6945	7740	6700	9675	8385	6450
14.00-24	10.0	1346	342	45	12165	10135	11105	9255	10315	9250	12890	11175	8595
14.00-25	11.25	1333	381	45	13210	11010	12060	10050	11200	9335	14000	11200	9335



MA608S

Characteristic slick profile and maximum contact area enables an exceptionally smooth performance. Ideal for environments with smooth surfaces such as ports, shipyards and airports.

Abrasion-resistant tread compound results in an excellent reliability and long service life.



Applications:



Size	 Rim	 O.D. (mm)	 S.W. (mm)	 Weight (kg)	Load capacity (kg)		
					6 km/h	10 km/h	25 km/h
10.00-20	7.5	1020	240	164	5895	5385	5000



MA902

Designed to perform in the toughest uses in extreme environments where an optimal ride quality is required. High loading capacity and a high mileage on a wide range of severe surfaces.

The smooth design leads to an increased damage resistance and excellent reliability.



Applications:



Size	 Rim	 O.D. (mm)	 S.W. (mm)	 Weight (kg)	Load capacity (kg) 25 km/h
17.5-25	14.00/1.5	1340	440	490	9500
20.5-25	17.00/2.0	1500	510	855	10500
23.5-25	19.50/2.5	1610	590	1148	13000
26.5-25	22.00/3.0	1720	650	1378	16000



MA801

Designed to eliminate downtime and provide superior vehicle performance and extreme duty uses such as waste and recycling. The enhanced rubber compound is designed for greater resistance to cutting and chunking.

A highly reliable tyre with a self-cleaning pattern and a long tread life.



Applications:



Size	 Rim	 O.D. (mm)	 S.W. (mm)	 Weight (kg)	Load capacity (kg) 25 km/h
30x10-16	6.0	760	240	66	2700
33x12-16	8.0	820	286	101	3200
33x12-20	8.0	830	285	87	3000
36.5x14-20	11.0	920	350	145	4000

MA802

Designed to eliminate downtime and provide superior vehicle performance and extreme duty uses such as waste and recycling. The enhanced rubber compound is designed for greater resistance to cutting and chunking.

A highly reliable tyre with a self-cleaning pattern and a long tread life.



Applications:



Size	 Rim	 O.D. (mm)	 S.W. (mm)	 Weight (kg)	Load capacity (kg) 25 km/h
13.00-24	8.5	1260	306	278	6560



Truck Tyres



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

011 461 1111

RG10

Steer axle, regional commercial tyre that is designed with an optimal balance of traction and long tread life in demanding on road applications.

Features:

- Precise steering in all conditions.
- 3PMSF Standard winter performance.
- Long-lasting durability.

Provides optimal fuel efficiency allowing fleet owners cost effectiveness on the route.



Applications:



M-TRUCK

STEER/TRAILER

REGIONAL

ECE

Size	PR	L/S Index	Fuel class	Wet class	3PMSF	M+S Mud and Snow	Noise	
							dB	Class
295/80R22.5	20	156/150L	C	C	✓	✓	72	B
315/70R22.5	20	156/150L	C	C	✓	✓	72	B
315/80R22.5	20	156/150L	C	C	✓	✓	72	C



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
19901 Bona Vista Road

RG11

Regional commercial tyre that is designed for reduced rolling resistance and high mileage performance in demanding on road applications.


Features:

- ▶ Guarantees precise steering and braking.
- ▶ 3PMSF Standard winter performance.
- ▶ Performs in all weather conditions.

4 circumferential grooves enhance the hydroplaning resistance.



Applications:

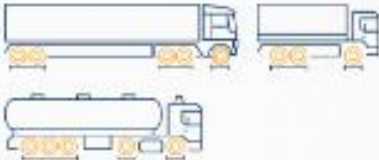

- M-TRUCK
- ALL POSITION
- REGIONAL
- ECE

Size	 PR	L/S Index	 Fuel class	 Wet class	 3PMSF	M+S Mud and Snow	 Noise	
							dB	Class
295/60R22.5	18	150/147K	C	C	✓	✓	73	B

RG20

Drive regional tyre that is designed for long tread life and good grip in demanding on road applications. Equipped with the M+S symbol it copes better on snowy roads than the standard model.


Features:

- Good grip in challenging conditions.
- 3PMSF Standard winter performance.
- Optimised traction to successfully evacuate water.

The low-void tyre tread design results in less deformation and higher mileage.



Applications:

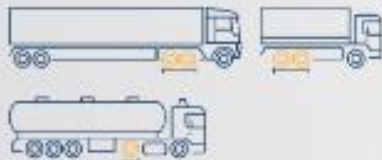

M-TRUCK

DRIVE

REGIONAL

ECE

Size	PR	L/S Index	Fuel class	Wet class	3PMSF	M+S Mud and Snow	Noise	
							dB	Class
295/80R22.5	20	154/149M	C	C	✓	✓	74	B
315/70R22.5	20	156/150L	C	C	✓	✓	74	B
315/80R22.5	20	156/150L	C	B	✓	✓	74	C



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
19901 Eway, 15271101

RG30

Trailer regional tyre with excellent performance and efficiency in demanding on road applications. Combines high payload capacity with high mileage, low noise level and fuel consumption.


Features:

- High carcass stiffness.
- Excellent traction on all road surfaces.
- 3PMSF Standard winter performance.

Optimal footprint for safer driving and improved abrasion resistance.



Applications:



M-TRUCK

TRAILER

REGIONAL

ECE

Size	PR	L/S Index	Fuel class	Wet class	3PMSF	M+S Mud and Snow	Noise	
							dB	Class
215/75R17.5	16	135/133J	D	C	✓	✓	74	B
245/70R17.5	18	143/141J	C	C	✓	✓	73	B
285/70R19.5	18	150/148J	C	C	✓	✓	73	B



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

011 440 1111

RG31

Highway all season tyre, which is made to be mounted on both steer and trailer axles for commercial vehicles in various on-road applications.

Features:

- High payload capacity and low fuel consumption.
- 3PMSF Standard winter performance.
- Long-lasting durability.

Wide circumferential grooves channel water away to prevent aquaplaning.



Applications:



M-TRUCK

STEER/TRAILER

REGIONAL

ECE

Size	PR	L/S Index	Fuel class	Wet class	3PMSF	M+S Mud and Snow	Noise	
							dB	Class
385/65R22.5	20	160K	C	B	✓	✓	74	B
385/65R22.5	24	164K	C	B	✓	✓	74	B



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

19001 0000 10271100

C010

Our solution for various on/off- road applications. Design of the tread pattern predestines it for installation on all axles of popular dump trucks operating in the vicinity of construction sites.

Features:

- All season compound.
- 3PMSF Standard winter performance.
- Guarantees a lengthened tread life.

Wide circumferential grooves and transverse ribs provide grip in off-road conditions.



M-TRUCK

ALL POSITION

ON/OFF-ROAD

ECE

Applications:



Size	PR	L/S Index	Fuel class	Wet class	3PMSF	M+S Mud and Snow	Noise	
							dB	Class
315/80R22.5	20	156/150K	D	C	✓	✓	74	B
13R22.5	20	156/150K	D	C	✓	✓	74	B



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

1900 8000 10271000

C020

Premium solution tyre for the commercial vehicles in various on/off-road applications. Developed to perform on construction sites, in mines or in road construction.

Features:

- Strong ribbed shoulder to prevent damage.
- 3PMSF Standard winter performance.
- Strong internal structure.

The deep aggressive tread is perfect to provide excellent traction and grip in off-road conditions.



Applications:



M-TRUCK

DRIVE

ON/OFF-ROAD

ECE

Size	PR	L/S Index	Fuel class	Wet class	3PMSF	M+S Mud and Snow	Noise	
							dB	Class
315/80R22.5	20	156/150K	D	C	✓	✓	75	B
13R22.5	20	156/150K	D	C	✓	✓	75	B



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

19/04/2024

C030

All season tyre which is made to be mounted on commercial vehicles in various on/off-road applications. Full-length steel belts offers increased durability.


Features:

- Reinforced carcass stiffness.
- 3PMSF Standard winter performance.
- Equal pressure distribution.

Wide circumferential grooves channel water away to prevent aquaplaning.



Applications:

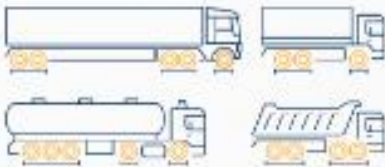

M-TRUCK

ALL POSITION

ON/OFF-ROAD

ECE

Size	PR	L/S Index	Fuel class	Wet class	3PMSF	M+S Mud and Snow	Noise	
							dB	Class
385/65R22.5	20	160K	D	B	✓	✓	74	B
385/65R22.5	24	164K	D	B	✓	✓	74	B
425/65R22.5	20	165K	D	B	✓	✓	74	B



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

011 440 1111

Underground Mining Tyres



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

© 2018 D&J Global

MU25

The aggressive E4/L4 open tread pattern provides outstanding grip and traction. Even contact area minimises vibration, resulting in improved operator comfort.

The directional block design and square shoulders provide outstanding durability.



E4 / L4

★★★★

★★★★

Applications:



Size	TT/TL	Star rating	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
29.5R29	TL	★★★★	L4	223A2	27250	8.0	25.00/3.5	2000	760	65
		★★★★★	E4	219A8	24300	8.0				
35/65R33	TL	★★★★	L4	229A2	32500	8.0	28.00/3.5	2050	880	62
		★★★★★	E4	225A8	29000	8.0				



D & J GLOBAL

IMPORT AND EXPORT (PTY) LTD

19000 0000 0000 0000

MU26

Experience superior grip and traction with our large pattern design, ensuring safety in underground coal and metal mines. Unmatched chip and wear resistance for reliable performance.

Precision pattern for optimal traction, ensuring stability and performance on various terrains effortlessly.



E4 / L4

★★★★

★★★★★

Applications:



Size	TT/TL	★ Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
26.5R25	TL	★★★★	L4	214A2	21200	8.0	22.00/3.0	1760	675	56
		★★★★★	E4	210A8	19000	8.0				
29.5R25	TL	★★★★	L4	221A2	25750	8.0	25.00/3.5	1875	750	66
		★★★★★	E4	217A8	23000	8.0				



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

1000 0000 1234 5678

MU30

Outstanding damage resistance and load capacity due to the reinforced radial casing. The reinforced sidewalls provides increasing shock and abrasion resistance.

Massive lugs and cut-resistant centre provide tread robustness and increased service life.



Applications:



E4 / L4

★★★★

★★★★★

Size	TT/TL	★ Star rating	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					lug	bar				
26.5R25	TL	★★★★	L4	214A2	21200	8.0	22.00/3.0	1730	660	56
	TL	★★★★★	E4	210A8	19000	8.0				
29.5R25	TL	★★★★	L4	221A2	25750	8.0	25.00/3.5	1865	765	59
	TL	★★★★★	E4	217A8	23000	8.0				



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
19001 Bona, 15271101

MA05S

All steel radial construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Extra-deep L5S smooth design provides best resistance to wear and cutting and lowers operating costs.



L5S

★★

★★★

Applications:



Size	TT/TL	Star rating	TRA code	L/S index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
17.5R25	TL	★★	L5S	182A2	8500	6.5	14.00/1.5	1400	445	66
18.00R25	TL	★★★	L5S	206A2	17000	9.0	13.00/2.5	1675	500	82
23.5R25	TL	★★	L5S	201A2	14500	6.5	19.50/2.5	1673	597	83
26.5R25	TL	★★	L5S	209A2	18500	6.5	22.00/3.0	1800	675	94
29.5R25	TL	★★	L5S	216A2	22400	6.5	25.00/3.5	1921	750	100
29.5R29	TL	★★	L5S	218A2	23600	6.5	25.00/3.5	2023	750	100
35/65R33	TL	★★	L5S	224A2	28000	6.5	28.00/3.5	2050	895	97



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD

1999-2021-10-10

MB05S

L5S

All cross-ply construction. Improved protector plies optimise load performance and operator comfort. New improved technology of the high-tech casing reduces heat build up inside the tyre.

Special tread compound, smooth deep tread design provides excellent resistance and improves tyre service life.



Applications:



Size	TT/TL	PR	TRA code	L/S Index	Load capacity		Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)
					kg	bar				
14.00-24	TL TT	28	L5S	188A2	10000	9.25	10.00	1420	375	63.5
17.5-25	TL	24	L5S	185A2	9250	7.0	14.00	1400	445	78
18.00-25	TL	40	L5S	206A2	17000	9.5	13.00	1675	500	94
26.5-25	TL	36	L5S	209A2	18300	6.25	22.00	1800	675	87.5



D & J GLOBAL
IMPORT AND EXPORT (PTY) LTD
P.O. Box 152711

Registration Details

Company registration number: 2021/860326/07

VAT number: 4830306389

Export permit number: CUS0062995

Import permit number: CUS0062568

Contact details:

D and J Global Import and Export (pty) LTD

16 Gerrit Maritz, SE2, Vanderbijlpark, 1911

Gauteng, South Africa

+27 81 329 1736

sales@djimportandexport.com

<https://remotaxis.shop>

